

# Essential Guide to Hose Reels



Series 7000




Reelcraft Industries is  
**ISO 9001:2000**  
Certified Since 1996

# 5 reasons why hose reels increase productivity



**Increase Safety**  
Reduce up to 50% of tripping accidents.



**Minimise Leakages**  
Reduce costs of air and water leakages.



**Reduce Hose Wear**  
Hose on reels can last up to five times longer.



**Improve Efficiency**  
Hose is where you want it, when you need it.



**Better Environment**  
No more tangled hoses.

## Reelcraft: Better by Design

### Improved Connection

The elongated brass connector and proprietary adhesion process provide a better crimp to the hose.

### Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

### Stress-free Swivel

Our full-flow design combines the highest grade seal design with supporting bearing surfaces to insure the longest possible life.

### Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.

### Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance.

### Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.



### Kinkless Hose

High quality PVC hose is specially blended for use on reels.

### Sealed Connection Points

Swivel and hose inlet connections seal against leaks.

### Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment.

### Long Service Life

Field-proven swivel assures long service life.

### Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

### Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

### Robust Latch

Wide profile combined with special spring assures maximum service life.

### Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

### Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Shown: 7850 OLP118

### To place an order, please advise:

1. Model number.
2. Product to be handled such as air, oil, water, etc.
3. Maximum operating pressure in BAR.
4. Maximum operating temperature in degrees Celsius.
5. Hose inside and outside diameters and length.
6. Installation height, especially if more than 4.8m.

### Additional Considerations:

A flexible connection between the reel and the source of supply is required to prevent possible misalignment and binding. Non-flexible connections will void the warranty. The pressure rating of inlet hose must be equal or greater than the rating of the reel.



## General Industrial Spring Retractable Reels

### Series RT - 6, 10 & 13mm I.D.

Reelcraft presents ReelTek, a new hybrid, lighter, spring-driven hose reel with a composite spool designed for applications that are less demanding, yet require a product that can withstand industrial use. Easy to install and maintain, ReelTek conveniently keeps hose organised for a more efficient, safer work area.

- ✓ Structural Strength
- ✓ Long Lasting Latch Spring
- ✓ Versatile Mounting
- ✓ Trouble-Free Maintenance
- ✓ Long Swivel Life
- ✓ Lightweight
- ✓ Hose Retracts Every Time
- ✓ Corrosion Resistance



RT650-OLP  
Patent No. 7,150,425

GENERAL INDUSTRIAL SPRING RETRACTABLE REELS												
MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH		PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm / in	mm / in	mtr / ft	mtr / ft				LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 65° C												
RT435 OLP	RT403 OLP	6 1/4	11 35	21	1/4	3/8	419	146	448	11		
RT450 OLP	RT405 OLP	6 1/4	15 50	21	1/4	3/8	419	146	448	12		
RT635 OLP	RT603 OLP	10 3/8	11 35	21	1/4	3/8	419	146	448	11		
RT650 OLP	RT605 OLP	10 3/8	15 50	21	1/4	1/2	419	159	448	14		
RT835 OLP	RT803 OLP	13 1/2	11 35	21	1/2	1/2	419	159	448	14		
RT850 OLP	RT805 OLP	13 1/2	15 50	21	1/2	1/2	419	184	448	16		
MEDIUM PRESSURE OIL REELS Maximum Temperature 65° C												
RT635 OMP	RT603 OMP	10 3/8	11 35	69	3/8	3/8	419	146	448	14		
RT835 OMP	RT803 OMP	13 1/2	11 35	69	1/2	1/2	419	159	448	16		
HIGH PRESSURE GREASE REELS Maximum Temperature 65° C												
RT435 OHP	RT403 OHP	6 1/4	11 35	345	3/8	3/8	419	146	448	15		
RT635 OHP	RT603 OHP	10 3/8	11 35	276	1/2	1/2	419	159	448	16		

Additional lengths available as standard. \*Weight of model with hose.

## Premium Duty Spring Retractable Reels

### Series 4000, 5000 & 5005 - 6, 10 & 13mm I.D.

Series 4000, 5000 & 5005 reels are durable and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. The Quiet Speed latch mechanism offers quiet operation combined with latch cam technology insuring longer latching life and trouble-free performance. The Series 5005 reel can handle hose lengths up to 15 meters. Reels are all steel construction and compact for different applications. The standard low pressure hose is for air or water service only. Consult Reelcraft for other products and hoses.



4625 OLP118

A5850 OLP118

PREMIUM DUTY SPRING RETRACTABLE REELS												
MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH		PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm / in	mm / in	mtr / ft	mtr / ft				LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 65° C												
4425 OLP118	4400 OLP118	6 1/4	8 25	21	1/4	3/8	321	137	327	9		
4435 OLP118	4400 OLP118	6 1/4	11 35	21	1/4	3/8	321	137	327	10		
5450 OLP118	5400 OLP118	6 1/4	15 50	21	1/4	3/8	343	152	368	12		
4625 OLP118	4600 OLP118	10 3/8	8 25	21	1/4	3/8	321	137	327	10		
5635 OLP118	5600 OLP118	10 3/8	11 35	21	1/4	3/8	343	152	368	12		
5650 OLP118	5605 OLP118	10 3/8	15 50	21	1/4	3/8	419	152	445	16		
A5825 OLP118	A5800 OLP118	13 1/2	8 25	21	1/2	3/8	343	152	368	14		
A5835 OLP118	A5805 OLP118	13 1/2	11 35	21	3/8	3/8	419	152	445	17		
A5850 OLP118	A5806 OLP118	13 1/2	15 50	21	1/2	3/8	419	178	445	20		
MEDIUM PRESSURE OIL REELS Maximum Temperature 99° C												
5435 OMP118	5400 OMP118	6 1/4	11 35	190	1/4	3/8	343	152	368	14		
5630 OMP118	5600 OMP118	10 3/8	9 30	155	3/8	3/8	343	152	368	14		
A5835 OMP118	A5805 OMP118	13 1/2	11 35	138	1/2	3/8	419	152	445	19		
HIGH PRESSURE GREASE REELS Maximum Temperature 99° C												
5435 OHP118	5405 OHP118	6 1/4	11 35	345	1/4	1/4	419	152	445	19		
5625 OHP118	5600 OHP118	10 3/8	8 25	276	1/4	1/4	419	152	368	14		

\*Weight of model with hose.

## Heavy Industrial Spring Retractable Reels

### Series 7000, 80000 & D80000

10, 13, 19 & 25mm I.D.

The series 7000 base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 and 80000 incorporate all steel construction and a baked-on powder coat finish to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.



7850 OLP118

82100 OLP118

HEAVY INDUSTRIAL SPRING RETRACTABLE REELS											
MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH	PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm / in	mtr / ft					LENGTH	WIDTH	HEIGHT	
<b>LOW PRESSURE AIR/WATER REELS</b> Maximum Temperature 65° C											
7650 OLP118	7600 OLP118	10 3/8	15 50	21	21	1/4	1/2	483	178	514	22
7670 OLP118	7600 OLP118	10 3/8	21 70	21	21	1/4	1/2	483	178	514	23
81100 OLP118	81000 OLP118	10 3/8	30 100	21	21	3/8	1/2	610	267	645	42
7850 OLP118	7800 OLP118	13 1/2	15 50	21	21	3/8	1/2	483	178	514	24
82075 OLP118	82000 OLP118	13 1/2	22 75	21	21	1/2	1/2	610	267	645	40
82100 OLP118	82000 OLP118	13 1/2	30 100	21	21	1/2	1/2	610	267	645	42
7925 OLP118	7900 OLP118	19 3/4	8 25	17	17	3/4	3/4	483	178	514	22
83050 OLP118	83000 OLP118	19 3/4	15 50	17	17	3/4	3/4	610	267	645	41
D83075 OLP118	D83000 OLP118	19 3/4	22 75	17	17	3/4	3/4	610	362	645	43
D84050 OLP118	D84000 OLP118	25 1	15 50	17	17	3/4	1	610	362	645	45
<b>MEDIUM PRESSURE OIL REELS</b> Maximum Temperature 99° C											
7850 OMP118	7800 OMP118	13 1/2	15 50	141	141	1/2	1/2	483	178	514	26
82075 OMP118	82000 OMP118	13 1/2	22 75	103	103	1/2	1/2	610	267	645	45
83050 OMP118	83000 OMP118	19 3/4	15 50	86	86	3/4	3/4	610	267	645	43
<b>HIGH PRESSURE GREASE REELS</b> Maximum Temperature 99° C											
7650 OHP118	7600 OHP118	10 3/8	15 50	275	275	1/4	1/2	483	267	514	22
81075 OHP118	81000 OHP118	10 3/8	22 75	275	275	3/8	1/2	610	267	645	55
81100 OHP118	81000 OHP118	10 3/8	30 100	275	275	3/8	1/2	610	178	645	58

Mounts to floor, wall, ceiling or truck. \*Weight of model with hose.

## Compact Dual Pedestal Reels

### Series DP7000 - 6, 10 & 13mm I.D.

Reelcraft's new DP7000 Series features our patented interlocking base design, which makes the base assembly especially strong and resistant to vibration. Independent testing has proven these reels to stand up to heavy vibration, making them ideal for truck mounted applications.



DP7650 OHP118

HEAVY INDUSTRIAL SPRING RETRACTABLE REELS											
MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH	PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm / in	mtr / ft					LENGTH	WIDTH	HEIGHT	
<b>LOW PRESSURE AIR/WATER REELS</b> Maximum Temperature 65° C											
DP7450 OLP118	DP7400 OLP118	6 1/4	15 50	21	21	1/4	1/2	419	203	432	21
DP7650 OLP118	DP7600 OLP118	10 3/8	15 50	21	21	1/4	1/2	419	203	432	21
DP7850 OLP118	DP7800 OLP118	13 1/2	15 50	21	21	3/8	1/2	419	229	432	23
<b>MEDIUM PRESSURE OIL REELS</b> Maximum Temperature 99° C											
DP7650 OMP118	DP7600 OMP118	10 3/8	15 50	155	155	3/8	1/2	419	203	432	25
DP7850 OMP118	DP7800 OMP118	13 1/2	15 50	138	138	1/2	1/2	419	229	432	26
<b>HIGH PRESSURE GREASE REELS</b> Maximum Temperature 99° C											
DP7450 OHP118	DP7400 OHP118	6 1/4	15 50	345	345	1/4	1/2	419	203	432	26
DP7650 OHP118	DP7600 OHP118	10 3/8	15 50	276	276	1/4	1/2	419	203	432	27

\*Weight of model with hose.

### Accessories

Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hoses. Additional questions? Please visit our website or call for assistance. For more than 30 years, our specialty is offering hose handling solutions.



Hose Bumper  
2-HR1004-3



Air & Water Hose Assembly  
601022-50



Swing Bracket  
600626



## Fuel Delivery / Grounding Reels Series G

Static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reduces chances of sparking and the potential for explosion.

### Series F7000, FD9000, F80000, FD80000 - 19 & 25mm I.D.

Reelcraft's spring retractable reels, equipped with Viton® seals, are ideal for delivering fuel. The reels incorporate metal forms to insure the greatest possible strength and function equally well in both mobile and permanent mount applications. These rugged, corrosion-resistant reels are suitable for a wide variety of applications. Series FD80000 reels are also supplied with our new ball-bearing style swivel.

G 3050 Y  
15m Cable



FD83075 OLP118

### GROUNDING REELS

MODEL	CABLE LENGTH		DESCRIPTION	DIMENSIONS (mm)			SHPG. WT. (lbs.)
	mtr	ft		LENGTH	WIDTH	HEIGHT	
G 3050	15	50	Single 7 x 7 strand steel cable	219	85	224	5.5
G 3050 N	15	50	Nylon covered cable	219	85	224	5.5
G 3050 Y	15	50	Steel cable splits in 2 @ 4.5m	219	85	224	5.5
GA3100 N	30	100	Nylon covered cable	235	110	248	10

### FUEL REELS

MODEL w/ HOSE**	MODEL w/o HOSE	I.D. mm / in	HOSE LENGTH mtr / ft	PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
							LENGTH	WIDTH	HEIGHT	
F7925 OLP118	F7900 OLP118	19 3/4	8 25	3.5	3/4	3/4	483	178	514	24
F83050 OLP118	F83000 OLP118	19 3/4	15 50	3.5	3/4	3/4	610	267	645	41
FD83075 OLP118	FD83000 OLP118	19 3/4	22 75	3.5	3/4	3/4	610	362	645	56
FD84050 OLP118	FD84000 OLP118	25 1	15 50	3.5	1	1	610	362	645	54
FD9350 OLP118	FD9300 OLP118	19 3/4	15 50	3.5	3/4	3/4	667	400	667	60
FD9450 OLP118	FD9400 OLP118	25 1	15 50	3.5	1	1	667	400	667	70

\*\*Models equipped with fuel grade hose. UL330 and ULC approved hose. \*Weight of model with hose. Note: Images of each series not shown above. See page 4 for 7000 & 9000 images.

## Premium Hand Crank / Heavy Duty Hand Crank / Motor Driven Reels

### Series H & 30000 - 13, 19 & 25mm I.D.

The Series 30000 reel features vibration-proof, self-locking fasteners to ensure assembly integrity. The Series H is an economical reel designed for medium duty applications requiring long lengths of hose. Both reels are equally suited for plant or field use such as lawn care, pest control and more.



H18000 M

CA33112 M118 shown with optional cart (600965)

### PREMIUM HAND CRANK REELS

MODEL	I.D. mm / in	HOSE CAPACITY mtr / ft	PRESSURE (bar)	(F) NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)
					LENGTH	WIDTH	HEIGHT	
H18000 M	13 1/2	61 200	207	1/2	508	464	483	15
H29000 M	19 3/4	38 125	207	3/4	508	616	483	19

### HEAVY DUTY HAND CRANK & MOTOR DRIVEN REELS

MODEL (refer to chart at right)	I.D. mm / in	HOSE CAPACITY mtr / in	PRESSURE (bar)	DIMENSIONS			
				LENGTH	WIDTH(CA)	WIDTH(EA/AA)	HEIGHT
□□32106 M□□□118	13 1/2	30 100	207	451	483	483	514
□□32112 M□□□118	13 1/2	61 200	207	451	635	641	514
□□32118 M□□□118	13 1/2	99 325	207	451	788	794	514
□□32122 M□□□118	13 1/2	122 400	207	451	889	895	514
□□32128 M□□□118	13 1/2	152 500	207	451	1016	1022	514
□□33106 M□□□118	19 3/4	15 50	207	451	483	483	514
□□33112 M□□□118	19 3/4	30 100	207	451	635	641	514
□□33118 M□□□118	19 3/4	53 175	207	451	788	794	514
□□33122 M□□□118	19 3/4	69 225	207	451	889	895	514
□□33128 M□□□118	19 3/4	84 275	207	451	1016	1022	514
□□37118 L□□□118	25 1	30 100	21	451	864	787	514

### Series 30000 Part Number Options

□□32106 M□□□118

↑ CA = Hand Crank  
↑ EA = Electric Motor = 12D  
↑ AA = Air, Pneumatic Motor = 4A

**Note:** Hose not included. Many more reel models available in addition to chart. Please call manufacturer for details on models not listed.

## Ultimate Duty / Floor / Truck Mount Spring Retractable Reels

### Series D9000 - 13, 19 & 25mm I.D.

Series D9000 reels offer the greatest amount of stability for high volume air or water. Fuel and petroleum models also available as standard (consult manufacturer). Ideal for portable service trucks, permanent service or plant work areas. The durable baked-on powder coat finish provides a high quality ultra violet radiation (sunlight) weather and chip resistant finish that will stay bright through years of use.

D9350 OLPBW118



#### ULTIMATE DUTY / FLOOR / TRUCK MOUNT SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH		PRESSURE (bar)	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm/in	mtr / ft	mtr	ft				LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 65° C												
D9299 OLPBW118	D9200 OLPBW118	13	1/2	30	100	21	1/2	1/2	667	400	667	58
D9350 OLPBW118	D9300 OLPBW118	19	3/4	15	50	17	3/4	3/4	667	400	667	60
D9375 OLPBW118	D9300 OLPBW118	19	3/4	23	75	17	3/4	3/4	667	400	667	69
D9450 OLPBW118	D9400 OLPBW118	25	1	15	50	17	3/4	1	667	400	667	70

Additional models for medium and high pressure. \*Weight of model with hose.

## Air / Water / Chemical Delivery Reels

### SG Series - 6, 8, 10 & 13mm I.D.

The SG Series is economical, lightweight and easy to handle. Its technical design and materials were selected to meet the demands of an industrial grade reel for continuous, trouble-free operation. This reel is made of corrosion proof, tough polypropylene and extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV Rays. Wall or floor mount. Hose included.

SG3666 ELAWR



#### SG SERIES REELS

MODEL	I.D.		HOSE LENGTH		PRESSURE (bar)	(M)BSP HOSE OUTLET (in.)	(F)BSP REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)
	mm/in	mtr / ft	mtr	ft				LENGTH	WIDTH	HEIGHT	
AIR & WATER REELS Working temperature 65° C.											
SG3666 ELAWR	10	3/8	20	66	16	3/8	3/8	578	241	483	10
SG3860 ELAWR	13	1/2	18	60	16	1/2	1/2	578	241	483	11
BREATHING AIR REEL											
SG3666 ELBY	10	3/8	20	66	16	3/8	3/8	578	241	483	10
WATER REEL Garden-style hose end. Working temperature 65° C.											
SG3850 ELHR	13	1/2	18	60	14	3/4 NH	1/2	578	241	483	11
HOT WATER WASH REEL Working temperature 85° C. Working pressure is related to working temperature.											
SG3860 ELGG	13	1/2	15	50	16	1/2	1/2	578	241	483	10
WELDING REELS											
SG3450 ELOAR	6	1/4	15	50	14	3/8	3/8	578	285	483	12
SG3650 ELOAR	8	5/16	15	50	14	3/8	3/8	578	285	483	12

## Gas Welding Reels

### Series TW & BA - 6 & 10mm I.D.

Series TW has an independent dual swivel body manufactured from aluminum and hard coated for wear resistance. This unique design assures positive separation of gases. Double-sealed, special molded "O" rings prevent leakage.

TW7450 OLP118



#### GAS WELDING REELS

MODEL w/ HOSE	MODEL w/o HOSE	I.D.		HOSE LENGTH		PRESSURE (bar)	HOSE OUTLET (in.)	REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)*
		mm/in	mtr / ft	mtr	ft				LENGTH	WIDTH	HEIGHT	
TW5425 OLP118	TW5400 OLP118	6	1/4	8	25	14	B 9/16-18(F)	1/4 (F)NPT	349	152	368	12
TW7450 OLP118	TW7400 OLP118	6	1/4	15	50	14	B 9/16-18(F)	1/4 (F)NPT	483	178	514	24
TW7460 OLP118	TW7400 OLP118	6	1/4	18	60	14	B 9/16-18(F)	1/4 (F)NPT	483	178	514	25
TW84100 OLPT118	TW84000 OLPT118	6	1/4	30	100	14	B 9/16-18(F)	B 9/16-18(M)	610	330	645	48
TW86075 OLPT118	TW86000 OLPT118	10	3/8	23	75	14	B 9/16-18(F)	B 9/16-18(M)	610	330	645	45
—	BA36106L	6	1/4	38	125	14	—	1/4 (F)NPT	451	423	524	22
—	BA36112L	6	1/4	76	250	14	—	1/4 (F)NPT	451	575	524	25

\*Weight of model with hose.



## Corrosion Resistant Reels

### Stainless Steel Series - 10, 13, 19 & 25mm I.D.

Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® "O" rings. Hose and bumper not included.

7800 OLS



#### STAINLESS STEEL REELS

MODEL	I.D.		HOSE LENGTH		PRESSURE (bar)	(F)NPTF REEL INLET (in.)	DIMENSIONS (mm)			WEIGHT (kg)
	mm / in		mtr / ft				LENGTH	WIDTH	HEIGHT	
7800 OLS	13	1/2	15	50	35	1/2	483	178	514	20
7600 OMS55	10	3/8	20	66	207	3/8	483	178	514	19
7800 OMS	13	1/2	15	50	207	1/2	483	178	514	21
81000 OLS	10	3/8	30	100	35	3/8	610	267	645	37
82000 OLS	13	1/2	30	100	35	1/2	610	267	645	36
83000 OLS70	19	3/4	15	50	35	3/4	610	267	645	36
D83000 OLS70	19	3/4	23	75	35	3/4	613	362	645	34
D84000 OLS70	25	1	15	50	35	1	613	362	645	35
82000 OMS	13	1/2	23	75	103	1/2	610	267	645	37
83000 OMS70	19	3/4	15	50	86	3/4	610	267	645	37
HS18000 M	13	1/2	61	200	207	1/2	508	413	483	16
HS28000 M	13	1/2	91	300	207	1/2	508	413	483	19
HS19000 M	19	3/4	23	75	207	3/4	508	413	483	16
HS29000 M	19	3/4	38	125	207	3/4	508	413	483	19
HS37000 L70	25	1	30	100	35	1	508	413	483	21

Note: All stainless steel hose reels are sold without hose. Hose can be quoted for depending on application, ask for details.

## Modular Large Frame Reels

### Series 40

The Series 40 line of large frame reels offers dimensional flexibility. Simply specify height, width and depth dimensions to fit your space requirements. The T-Slot aluminum frame provides extra structural strength. The spun edge design of the powder coated flanges, plus the aluminum frame and zinc-plated fasteners offer the greatest amount of corrosion protection and durability.

Series 40  
Patent Pending



#### SERIES 40 MODULAR LARGE FRAME REELS

MODEL	DRIVE TYPE				PRESSURE (bar)	CAPACITY mtr / ft	HOSE I.D. mm / in	DIMENSIONS (mm)				
	CHOOSE 1							LENGTH	WIDTH(BG)	WIDTH(EH/DH)	HEIGHT	
412101	CG	BG	EH	DH	1LC70	41	30 100	25 1	635	502	552	660
412191	CG	BG	EH	DH	1LC70	41	60 200	25 1	635	781	781	660
413221	CG	BG	EH	DH	1LC70	41	100 325	25 1	737	806	857	737
422101	CG	BG	EH	DH	1LC70	41	25 80	32 1¼	635	502	552	660
422191	CG	BG	EH	DH	1LC70	41	45 140	32 1¼	635	781	781	660
423221	CG	BG	EH	DH	1LC70	41	75 250	32 1¼	737	806	857	737
432101	CG	BG	EH	DH	1LC70	41	15 50	38 1½	635	502	552	660
432191	CG	BG	EH	DH	1LC70	41	30 100	38 1½	635	781	781	660
433221	CG	BG	EH	DH	1LC70	41	60 200	38 1½	737	806	857	737

For Electric Motor models add 76mm to length shown in above chart.

- CG = Hand Crank
- BG = Bevel Crank
- EH = 12V DC Gear Drive
- DH = 12V DC Chain Drive

Please note the following part numbers are for standard reels. Series 40 is design to be flexible with a choice of height, width and depth sizes, please call for advice.

## Reelcraft's Engineered Product Solutions

When a reel application requires extra strength and quality, it demands Reelcraft's line of large frame reels. Our standard large frame products range in size from 1" I.D. up to 4" I.D. and we offer custom engineered products beyond 4". Reelcraft's line of large frame reels offers a heavy duty, durable solution to any hose and cable application. See our Large Frame Reels catalogue for the complete range.



#1123-802

NORDIC  
Series 3700



TECHNISCHE HANDELSONDERNEMING  
"BREEDVELD & WEAVER"  
HYDRAULISCHE APPARATUUR

G. STEPHENSONWEG 33  
3133 KJ VLAARDINGEN  
N E D E R L A N D  
TELEFOON 010 - 4388922


POSTBUS 154  
3130 AD VLAARDINGEN  
N E D E R L A N D  
TELEFAX 010-4385198

www.breedveld-weaver.nl

info@breedveld-weaver.nl




**REELCRAFT**

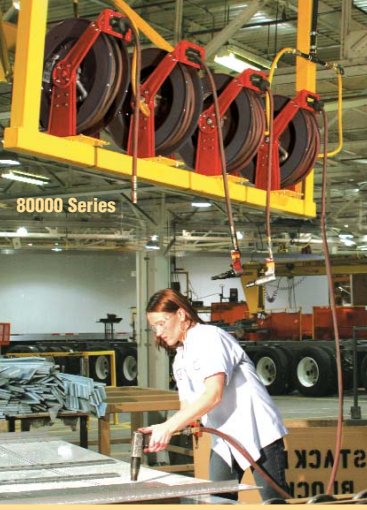

Wabash National Corporation, Lafayette, Indiana

# Work Smarter



917-1097



MCAT-001S



MCAT-001G



MCAT-001F

TECHNISCHE HANDELSONDERNEMING  
**"BREEDVELD & WEAVER"**  
 HYDRAULISCHE APPARATUUR

G. STEPHENSONWEG 33  
 3133 KJ VLAARDINGEN  
 N E D E R L A N D  
 TELEFOON 010 - 4358522

POSTBUS 154  
 3130 AD VLAARDINGEN  
 N E D E R L A N D  
 TELEFAX 010-4355198

[www.breedveld-weaver.nl](http://www.breedveld-weaver.nl)

[info@breedveld-weaver.nl](mailto:info@breedveld-weaver.nl)

